

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 April 2005 (14.04.2005)

PCT

(10) International Publication Number
WO 2005/032804 A1

(51) International Patent Classification⁷: **B29C 70/22**,
70/54

(21) International Application Number:
PCT/US2004/029605

(22) International Filing Date:
13 September 2004 (13.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/674,987 30 September 2003 (30.09.2003) US
10/699,536 31 October 2003 (31.10.2003) US

(71) Applicant (for all designated States except US): **OWENS CORNING** [US/US]; One Owens Corning Parkway, Toledo, OH 43659 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DUNN, Mathew, W.** [US/US]; 5433 Vicaris Street, Philadelphia, PA 19128 (US). **RODRIGUEZ, Juan, F.** [US/US]; 157 Rio Grande Drive, Seguin, TX 78155 (US).

(74) Agents: **GASAWAY, Maria, C.** et al.; Owens Corning Science & Technology Center, 2790 Columbus Road, Bldg 11-7, Granville, OH 43023-1200 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CRIMP-FREE INFUSIBLE REINFORCEMENT FABRIC AND COMPOSITE REINFORCED MATERIAL THEREFROM

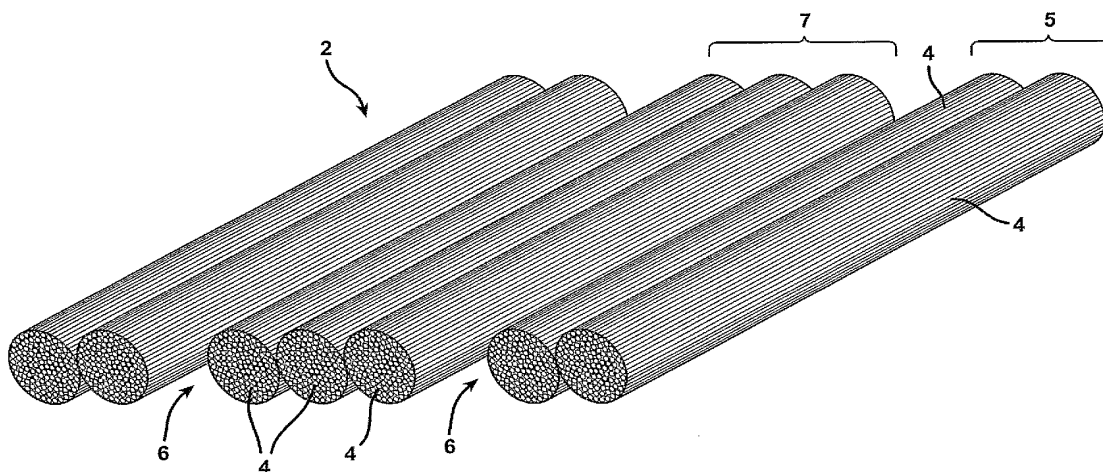

(57) Abstract: The present invention relates to a composite fabric (2) having a plurality of substantially parallel, coaxially aligned tow groups (5, 7), each of the tow groups having one or more tows (4) wherein a portion of the tow groups contain two or more tows, wherein the spacing (6) between tows in a tow group is less than the spacing between adjacent tow groups. The spacing between adjacent tow groups form flow channels which permit resin to flow evenly and quickly through the fabric. This results in shorter processing time and a more consistent resin distribution, decreasing the likelihood of resin starved areas within the cured laminate.

WO 2005/032804 A1

CRIMP-FREE INFUSIBLE REINFORCEMENT FABRIC AND COMPOSITE REINFORCED MATERIAL THEREFROM

TECHNICAL FIELD AND INDUSTRIAL

5 APPLICABILITY OF THE INVENTION

This invention relates to composite fabrics and to a method of making composite fabrics. More particularly, it relates to an improved composite fabric having flow channels, which, when resin is applied to the fabric during lamination, permit faster resin distribution in the fabric.

10

BACKGROUND OF THE INVENTION

Composite fabrics made from fibrous materials formed into both woven, knitted and non-woven material, are well-known in the art. Yarns of glass, carbon and graphite are typically formed into fabrics, and a plurality of layers of fabric are stacked and cut into dry fabric preforms. The preforms are then stitched and/or impregnated with a resin binder to form a rigid composite fabric.

Typically, a glass reinforced fibrous mat is preformed and then placed in a mold for molding into a fiber-reinforced article. Glass fiber-reinforcement mats are used in situations where a desired strength is necessary, such as in boat hulls or automobile parts. For example, layers of the continuous strand mat and layers of unidirectional or multidirectional reinforcement material are fabricated separately. These layers are individually placed in a set of preform screens, which generally consist of an upper screen and a lower screen. The upper and lower screens are moved together in order to conform the layers to the shape of the preform screens. The layers are thus shaped into what is known as a preform. The preform is then placed in a mold and injected with a suitable resinous material to make the fiber-reinforced article.

As shown in U.S. 4,911,973, to facilitate impregnation of the fabric with resin, holes are typically punched in the fabric as two or more layers of fabric are sewn together. The holes extend through the fabric and when the fabric is impregnated with resin, the resin material flows into the holes in the blanket. The holes in the fabric aid in distributing resin throughout the fabric.

The crimping of the yarns that occurs as the warp and weft yarns cross over and under each other reduces the tensile and, more significantly, the compressive strength of a

woven fabric. In the past, fabrics have been designed utilizing yarns having varying denier (fiber diameter) to increase strength and reduce crimping of the fabric.

U.S. Patent 4,615,934 teaches a fabric having warp yarns of heavy denier separated by eight warp yarns of lighter denier. The fabric is incorporated into a polymeric resin by lamination, heat bonding or coating the fabric with the resin. U.S. 5,147,714 (related to 4,615,934) utilizes this same concept of alternating heavier and lighter denier yarns however the fabric is laminated between two conductive sheets of PVC film.

U.S. 4,460,633 teaches a non-woven reinforcement constructed of high denier warps of non-twist yarns or soft twist yarns on both sides of lower denier wefts of non-twist yarns or soft twist yarns containing an adhesive agent, in which the warps and wefts are bonded where they intersect.

U.S. 4,407,885 and U.S. 4,410,385 (related) teach a composite non-woven fabric and a method of making the composite fabric in which the layers of the fabric are impregnated with a resin binder to form a rigid composite fabric. Thermoplastic fibrous material is incorporated within the structure of non-woven layers. A plurality of layers of fabric are stacked adjacent each other to provide a preform assembly. The layers are then compacted and heated to promote the bonding of the thermoplastic material at junctures between the fibrous non-woven material.

U.S. 5,085,928 teaches porous layers of unidirectional aramid fibers alternated with porous layers of spunlaced nonwoven aramid fibers all of which are embedded in a thermoplastic resin.

U.S. 5,809,805 teaches a warp/knit stitch reinforced multi-axial non-crimp layered fabric sheet. The fabric is comprised of a plurality of plies, which have a different angular relationship to one another, disposed upon one another and knitted or stitched to form a structural sheet. The sheet is then impregnated with a resin.

U.S. 5,445,693 and related U.S. 5,055,242 teach a formable composite material having a plurality of superimposed layers each having having a plurality of unidirectional non-woven yarns or threads laid side-by-side. Some of the yarns or thread extend of different layers extend in different directions. The layers are incorporated with a resin material prior to being stitched together.

U.S. 5,149,583 teaches a mat in which reinforcing threads are bound or laminated to form a strong shell structure. The knitting of the mat is performed with a double circular knitting machine to form a weft-knitted mat. The fabric contains a plurality of

loops in which reinforcing threads run with the support of the loops and straight between the courses in a channel formed by the loops.

As taught above, it is known to have heavy denier warp yarns separated from each other by lighter denier warp yarns in a warp-inserted weft knit fabric. Also, using sewing
5 needles to form a plurality of channels in a reinforcement blanket to aid in distributing resin throughout the blanket is known. Both methods permit resin to be distributed throughout the fabric.

There is a need to provide a fabric, having continuous fibers, to be used in a molding process, in which the design of the fabric increases the speed of resin infusion to
10 reduce processing time in the mold.

The foregoing and other advantages of the invention will become apparent from the following disclosure in which one or more preferred embodiments of the invention are described in detail and illustrated in the accompanying drawings. It is contemplated that variations in procedures, structural features and arrangement of parts may appear to a
15 person skilled in the art without departing from the scope of or sacrificing any of the advantages of the invention.

SUMMARY OF THE INVENTION

The present invention relates to a composite fabric wherein a plurality of
20 substantially parallel, coaxially aligned tow groups, each of said tow group having one or more tows wherein a portion of said tow groups contain two or more tows. The spacing between tows in a tow group is less than the spacing between adjacent tow groups. The spacing between adjacent tow groups forms flow channels. The flow channels permit resin to flow evenly and quickly through the fabric, which results in shorter processing
25 time and a more consistent resin distribution, decreasing the likelihood of resin starved areas within the cured laminate.

It is an object of this invention to provide a crimp-free composite fabric.

It is an object of this invention to provide a composite fabric, which is designed to decrease the processing time of resin infusion.

30 It is an object of this invention to provide a composite fabric that is usable with all types of resin systems.

It is an object of this invention to provide a composite fabric which can be constructed of various types of fibers.

It is an object of this invention to provide a fabric which is constructed of various composite materials, that is, glass and thermoplastic.

BRIEF DESCRIPTION OF DRAWINGS

5 Fig. 1 is a fragmentary, perspective view of a preferred fabric configuration of the present invention.

 Fig. 2 is a cross-sectional view of a preferred fabric configuration of the present invention.

 Fig. 3 is a partially sectional perspective view showing a biaxial fabric of the
10 present invention.

 Fig. 4 is a partially sectional perspective view showing a triaxial fabric of the present invention.

 Fig. 5 is a partially sectional perspective view showing a quadaxial fabric of the present invention.

15 In describing preferred embodiments of the invention, which are illustrated in the drawings, specific terminology is resorted to for the sake of clarity. However, it is not intended that the invention be limited to the specific terms so selected and it is to be understood that each specific term includes all technical equivalents that operate in a similar manner to accomplish a similar purpose.

20 Although preferred embodiments of the invention are herein described, it is understood that various changes and modifications in the illustrated and described structure can be affected without departure from the basic principles that underlie the invention. Changes and modifications of this type are therefore deemed to be circumscribed by the spirit and scope of the invention, except as the same may be
25 necessarily modified by the appended claims or reasonable equivalents thereof.

DETAILED DESCRIPTION OF INVENTION

 The above objects have been achieved through the development of a fabric comprising a plurality of substantially parallel, coaxially aligned tow groups, each of said
30 tow group containing one or more tows wherein a portion of said tow groups contain two or more tows. The spacing between tows in a tow group is less than the spacing between adjacent tow groups. The spacing between adjacent tow groups forms flow channels. The flow channels can be formed in a single ply in a fabric or in any number of plies in a

multi-ply fabric. When the fabric is infused with resin, the flow channels permit faster resin infusion of the fabric (typically between about 40% to about 60%).

For the purposes of this invention, the term "tow" refers to an untwisted assembly of a large number of filaments (single fibers). The term "tow group" refers to one or more
5 tows that are closely spaced.

Referring to Fig. 1, a fragmentary, perspective view of the fabric of the present invention is shown. Fabric 2 is made of a plurality of substantially parallel, coaxially aligned tows 4 which comprise adjacent tow groups 5, 6. As illustrated in Fig. 1, tow group 5 contains two tows and tow group 7 contains three tows. The tow groups in fabric
10 2 are intermittently spaced, the spaces forming flow channels 6. The placement of flow channels between tow groups may vary, that is, one tow group, having two adjacent tows, between a tow group, having four adjacent tows, and equally spacing tow groups. The ratio of tow groups to flow channels may be determined by the resin, that is, a more viscous resin would require equally alternating tow groups to flow channels, thus
15 providing more channels for the flow of the resin. In the alternative, a less viscous resin would require less flow channels.

Fig. 2 illustrates a cross-sectional view of the fabric 2 of Fig. 1 showing tow groups 5, 7, containing tow 4. Tow groups 5, 7 are spaced so as to form flow channels 6.

Fig. 1 illustrates the tows 4, in tow group 5, as abutting one another. Alternatively
20 (not shown), the tow in the tow groups may be spaced so long as the distance between the tows is less than that of the distance between the tow groups forming the flow channel. The size of the flow channel is typically between about 0.155 to about 1.28 centimeters. Preferably, tows 4 have a yield (yards/pound (meter/kilogram)) of between about 52 (104.83) to about 450 (907.16) yield, more preferably of between about 150 (302.38) to
25 about 350 (705.57) yield and most preferably between about 150 (302.38) to about 220 (443.50) yield.

The present invention is compatible with various different glass fiber-reinforcements. Any suitable unidirectional or multidirectional reinforcement materials can be employed. It is within the contemplated scope of this invention that such
30 unidirectional or multidirectional reinforcement material include, but not be limited to, such materials as, for example, chopped strand mat, knitted rovings or woven rovings, aramid reinforcements or carbon reinforcements. Unidirectional knitted rovings are normally comprised of E-glass rovings, (such as rovings of 300 yield (604.77)), for

example, rovings known as T30 from Owens Corning). Bidirectional knitted roving material is constructed by a precision knitting process. The fiberglass strands are typically treated with a binder or sizing (such as Owens Corning 111A and PPG 2022), a wetting agent, emulsifying agent and water. These sizes or binders are intended to protect the
5 fibers from damage during their formation and subsequent operations of twisting, plying and weaving.

The fabric of the present invention may be constructed of woven, knitted or non-woven fibers, yarns, threads, filaments and the like. The structural fibrous materials may be any well-known materials which form fibers, filaments, threads, yarns, woven fabrics,
10 knitted fabrics, non-woven fabrics, batts, felts, and the like. As used herein, the term, structural fibrous material, embraces all of the various types of materials, which form such fabrics useful to form a composite fabric in accordance with the present invention. Exemplary structural fibrous materials include glass in the form of glass fibers, carbon or graphite in the form of carbon or graphite fibers, non-graphite carbon fibers, vitreous
15 carbon fibers, boron monolithic graphite and monolithic non-graphite carbon fibers, silicon, aramid and other refractory materials. In addition, thermoplastic fibrous material may also be used. The fabric may also be a hybrid fabric, having more than one type of structural fiber in its construction, that is, glass/thermoplastic, aramid/glass, and other combinations such as combination of the materials listed above.

20 Figs. 1-2 depict a unidirectional fiber orientation of the fabric 2. There are various methods of maintaining the primary fibers in position in a unidirectional fabric including weaving, stitching, and bonding, as is known in the art. In a preferred embodiment, the fibers are crimp-free warp knitted fabrics otherwise know as stitch-bonded fabrics.

The tows are held in place by a secondary, non-structural stitching thread, typically
25 a polyester thread or any other thread conventionally used in the art. Regardless of the structure, the fabric 2 of the present invention is a corrugated fabric, which is essentially crimp-free as a result of the flow channels 6. Preferably, the fabric 2 of the present invention is stitch-bonded using conventional stitch-bonding techniques and styles, that is, chain, tricot, modified tricot, promat). Conventional machines known in the art such as a
30 Liba stitch-bonding machine are used to make the fabric of the present invention.

The structure of the fabric of the present invention may also be bi-axial, tri-axial, quadaxial or multiaxial fabric structures. Conventional fabrics are made by weaving fibers

in two perpendicular directions (warp and weft). Weaving, though, bends the fibers, reducing the maximum strength and stiffness that can be attained.

Typical stitch-bonded, multiaxial fabrics consist of several layers of unidirectional fiber bundles or tows held together by a non-structural stitching thread (usually polyester).

5 The tows in each layer can be input at almost any angle between 0° and 90° . The entire fabric may be made of a single material, or different materials can be used in each layer for a hybrid fabric.

Fig. 3 illustrates biaxial fabric 8 of the present invention. Fabric 8 contains layers 16 and 18. Layer 16 has tow groups 12, 14 spaced between flow channels 26, 28, 30 and
10 layer 18 has tow groups 20, 22 spaced between flow channels 32, 34, 36. As shown in Fig. 3, the tow groups in layer 16 of biaxial fabric 8 lie at a 90° angle and the tow groups in layer 18 lie at a 0° angle which is a conventional biaxial fabric structure as is known in the art.

Fig. 4 illustrates triaxial fabric 38 of the present invention. Fabric 38 contains
15 layers 40, 42 and 44. Layer 40 has tow groups 46, 48 spaced between flow channels 50, 52 and 55, layer 42 has tow groups 56, 58 spaced between flow channels 60, 62 and 64 and layer 44 has tow groups 53, 55 spaced between flow channels 57, 59 and 61. As shown in Fig. 4, the tow groups in layer 40 of triaxial fabric 38 lie at a 90° angle, the tow groups in layer 42 lie at a -45° angle and the tow groups in layer 44 lie at a 0° angle which
20 is typical construction of a triaxial fabric as is known in the art.

Fig. 5 illustrates quadaxial fabric 64 having layers 66, 68, 70 and 72. Layer 66 has tow groups 74, 76 and 78 spaced between flow channels 78, 80 and 82, layer 68 has tow groups 84, 86 spaced between flow channels 88, 90 and 92, layer 70 has tows groups 94, 96 spaced between flow channels 98, 100 and 102 and layer 72 has tow groups 104, 106
25 spaced between flow channels 108, 110 and 112. As shown in Fig. 5, the tow groups in layer 66 of triaxial fabric 64 lie at a 90° angle, the tow groups in layer 68 lie at a -45° angle, the tow groups inn layer 70 lie at a $+45^\circ$ angle and the tow groups in layer 72 lie at a 0° angle. This is typical construction of a quadaxial fabric as is known in the art.

Although the angles of the layers in Figs. 3-5 are illustrated as described above,
30 any combination of angles may be used depending on the application of the fabric. The fabrics of the present invention may be engineered to meet specific requirements and support multiple tasks according to the application of the fabric, that is, automotive parts, etc.

As mentioned, the fabric of the present invention is particularly useful in molding processes where resin must move through a fabric to create a consolidated composite. One particular process is resin transfer molding (RTM). Resin transfer molding (RTM) is a process by which a resin is pumped at low viscosities and low pressures into a closed mold die set containing a preform of dry fabric, that is, fabric 2, to infuse resin into the preform and to make a fiber-reinforced composite part. The RTM process can be used to produce at low cost composite parts that are complex in shape. These parts typically require continuous fiber reinforcement along with inside mold line and outside mold line controlled surfaces. The ability to include and place continuous fiber reinforcement in large and small structures sets RTM apart from other liquid molding processes. Fabric 2 is also useful in a vacuum assisted resin transfer molding (VARTM) system. In VARTM, the preform is covered by a flexible sheet or liner, such as fabric 2.

The flexible sheet or liner is clamped onto the mold to seal the preform in an envelope. A catalyzed matrix resin is then introduced into the envelope to wet the preform. A vacuum is applied to the interior of the envelope via a vacuum line to collapse the flexible sheet against the preform. The vacuum draws the resin through the preform and helps to avoid the formation of air bubbles or voids in the finished article. The matrix resin cures while being subjected to the vacuum. The application of the vacuum draws off any fumes produced during the curing process. The fabric 2 of the present invention is useful in standard vacuum infusion molding processes as well as process where the reinforced fabric is under vacuum.

Suitable thermoplastic resins useful with the present invention in the above molding processes include polyesters (including copolyesters), for example, polyethylene terephthalate, polyamides, polyolefins, and polypropylene. Thermosetting resins that are useful include phenolic resins, epoxy resins, vinyl ester resins, and thermosetting polyester resins.

It is possible that changes in configurations to other than those shown could be used but that which is shown is preferred and typical. It is therefore understood that although the present invention has been specifically disclosed with the preferred embodiment and examples, modifications to the design concerning sizing and shape will be apparent to those skilled in the art and such modifications and variations are considered to be equivalent to and within the scope of the disclosed invention and the appended claims.

WHAT IS CLAIMED IS:


1. A fabric (2) comprising a plurality of substantially parallel, coaxially aligned tow groups (5, 7), each of said tow group having one or more tows (4) wherein a portion of said tow groups contain two or more tows, and wherein the spacing (6) between tows in a tow group is less than the spacing between adjacent tow groups.
2. The fabric of claim 1, wherein said adjacent tow groups contain an even number of tows.
3. The fabric of claim 1, wherein said adjacent tow groups contain an odd number of tow(s).
4. The fabric of claim 1, wherein said fabric comprises reinforced composite material.
5. The fabric of claim 1, wherein the spacing between the adjacent tow groups defines a flow channel.
6. The fabric of claim 1, wherein said tows are stitched together.
7. The fabric of claim 1, wherein the spacing between the adjacent tow groups is between about 0.155 to about 1.28 centimeters.
8. The fabric of claim 1, wherein said fabric is a crimp-free fabric.
9. The fabric of claim 1, wherein said yield of each of said tows is between about 52 to about 450 yards/pound (about 104.83 to about 907.16 meters/kilogram).
10. The fabric of claim 9, wherein said yield of each of said tows is between about 52 to about 350 yards/pound (about 104.83 to about 705.57 meters/kilogram).
11. The fabric of claim 10, wherein said yield of each of said tows is between about 150 to about 220 yards/pound (about 302.38 to about 443.50 meters/kilogram).
12. The fabric of claim 1, wherein said fabric is a unidirectional fabric (2).
13. The fabric of claim 1, wherein said fabric is a biaxial fabric (8).
14. The fabric of claim 1, wherein said fabric is a triaxial fabric (38).
15. The fabric of claim 1, wherein said fabric is a quadaxial fabric (64).
16. The fabric of claim 1, wherein said tows comprise composite fibers selected from the group consisting of glass and thermoplastic.
17. A method of making a fabric (2) comprising the steps of:
 - a. providing a plurality of substantially parallel tow groups (5, 7), each of said tow group (4) containing one or more tows wherein a portion of said tow groups contain two or more tows;


- b. coaxially aligning said tow groups; and
 - c. providing a space (6) between said at least two of said tow groups, wherein the spacing between tows in a tow group is less than the spacing between adjacent tow groups.
18. The method of claim 17, wherein said plurality tow groups are stitched together.
19. The method of claim 17, wherein said fabric is a crimp-free fabric.
20. The method of claim 17, wherein said yield of each of said tows is between about 150 to about 500 yards/pound (about 302.38 to about 1007.95 meters/kilogram).
21. The method of claim 20, wherein said yield of each of said tows is between about 150 to about 250 yards/pound (about 302.38 to about 503.98 meters/kilogram).
22. The method of claim 21, wherein said yield of each of said tows is between about 190 to about 220 yards/pound (about 383.02 to about 443.50 meters/kilogram).
23. The method of claim 17, wherein said fabric is a unidirectional fabric (2).
24. The method of claim 17, wherein said fabric is a biaxial fabric (8).
25. The method of claim 17, wherein said fabric is a triaxial fabric (38).
26. The method of claim 17, wherein said fabric is a quadaxial fabric (64).
27. The method of claim 17, wherein the spacing between the adjacent tow groups is between about 0.155 to about 1.28 centimeters
28. The method of claim 17, wherein the spacing between the adjacent tow groups defines a flow channel.
29. The method of claim 17, further comprising the step of infusing said fabric with resin using a resin transfer molding process.
30. The method of claim 17, further comprising the step of infusing said fabric with resin using a vacuum assisted resin transfer molding system.
31. The method of claim 30, wherein said fabric is infused with a resin selected from the group consisting of polyesters and copolyesters.
32. The method of claim 31, wherein said polyesters are selected from the group consisting of polyethylene terephthalate, polyamides, polyolefins, and polypropylene.
33. The method of claim 30, wherein said fabric is infused with a resin selected from the group consisting of polyesters and copolyesters.

34. The method of claim 33, wherein said polyesters are selected from the group consisting of polyethylene terephthalate, polyamides, polyolefins, and polypropylene.

1/5

FIG. 1

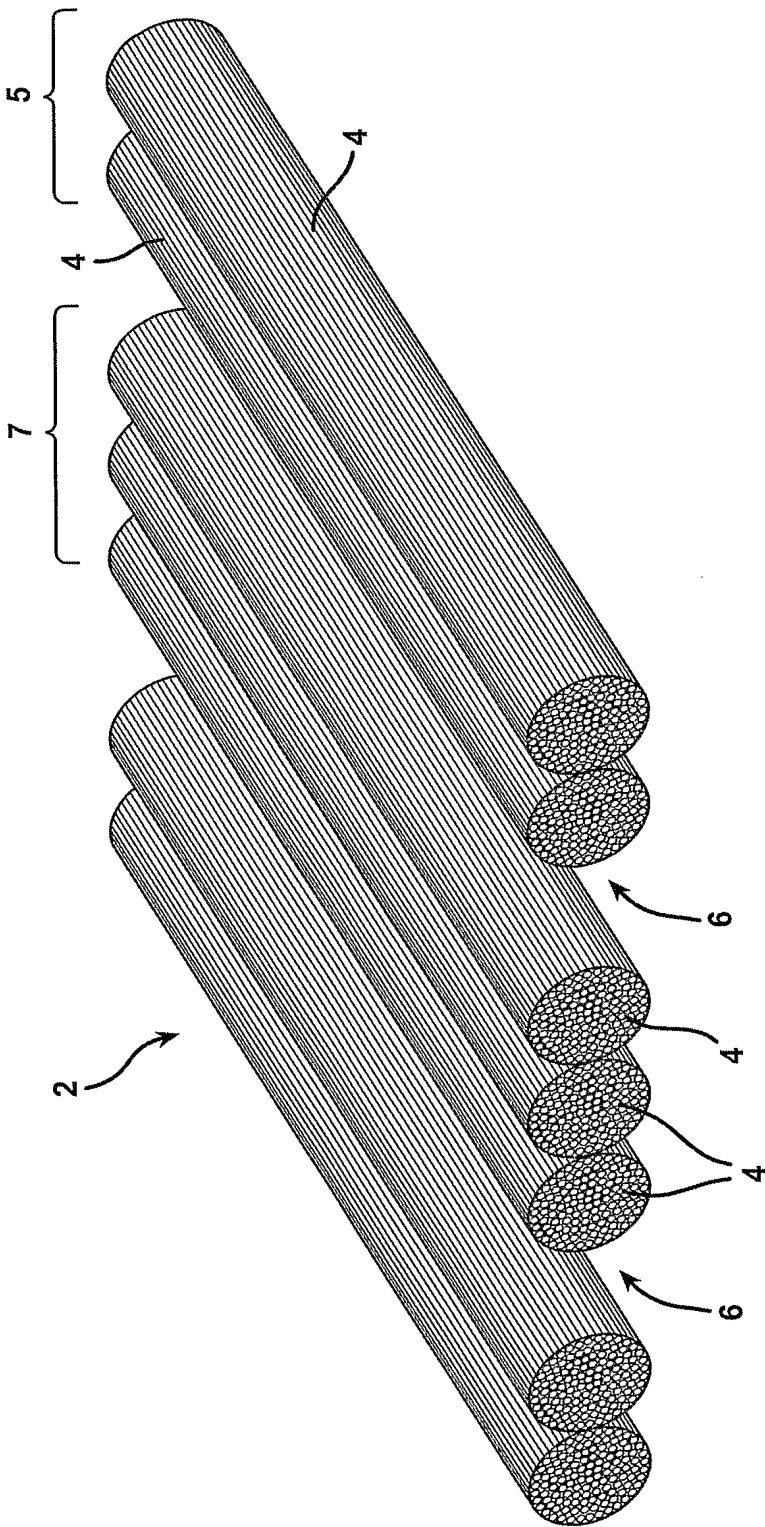

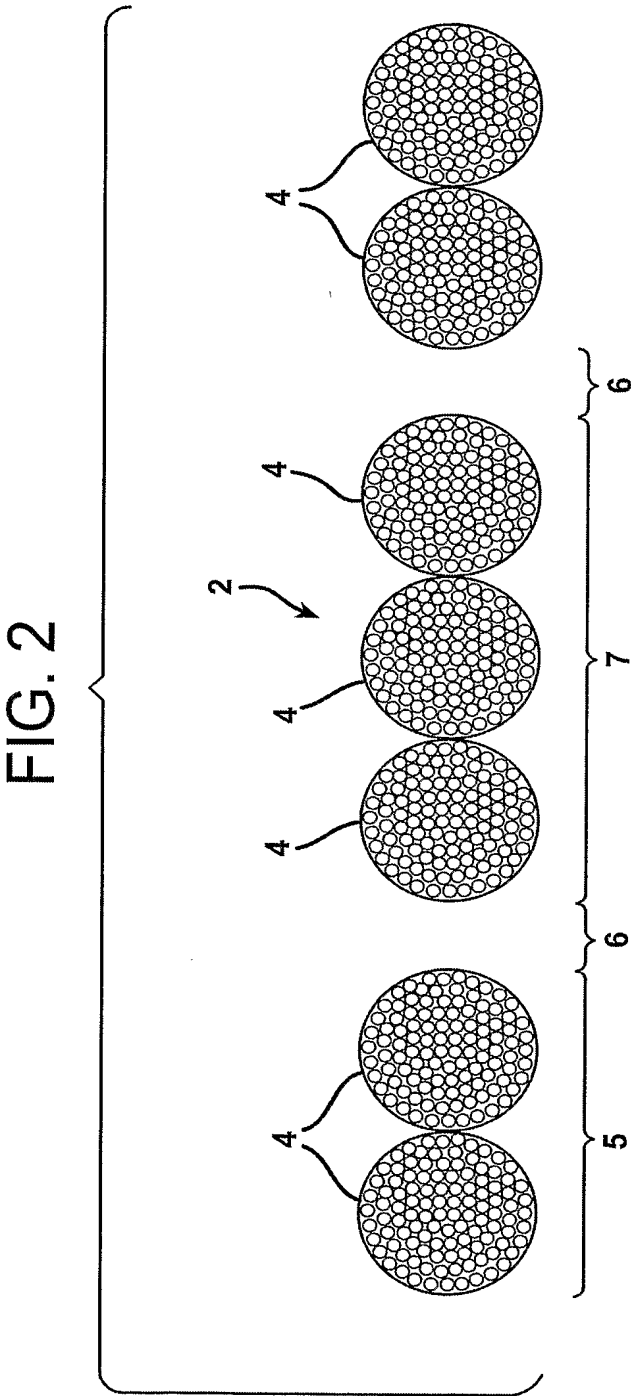



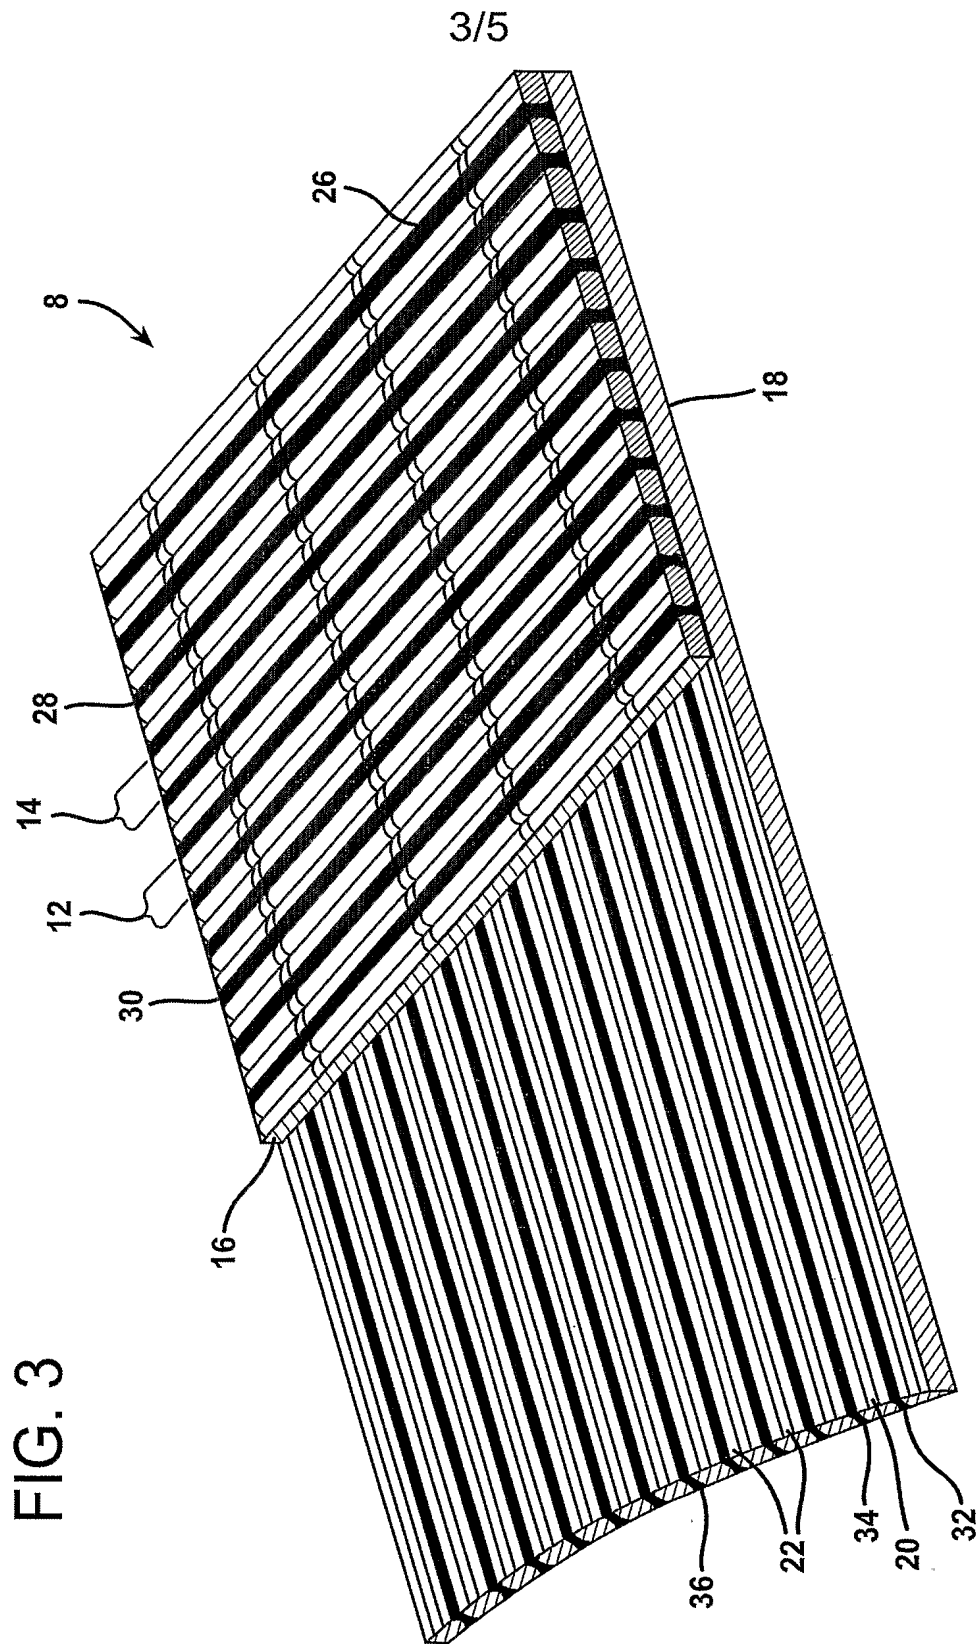


FIG. 4

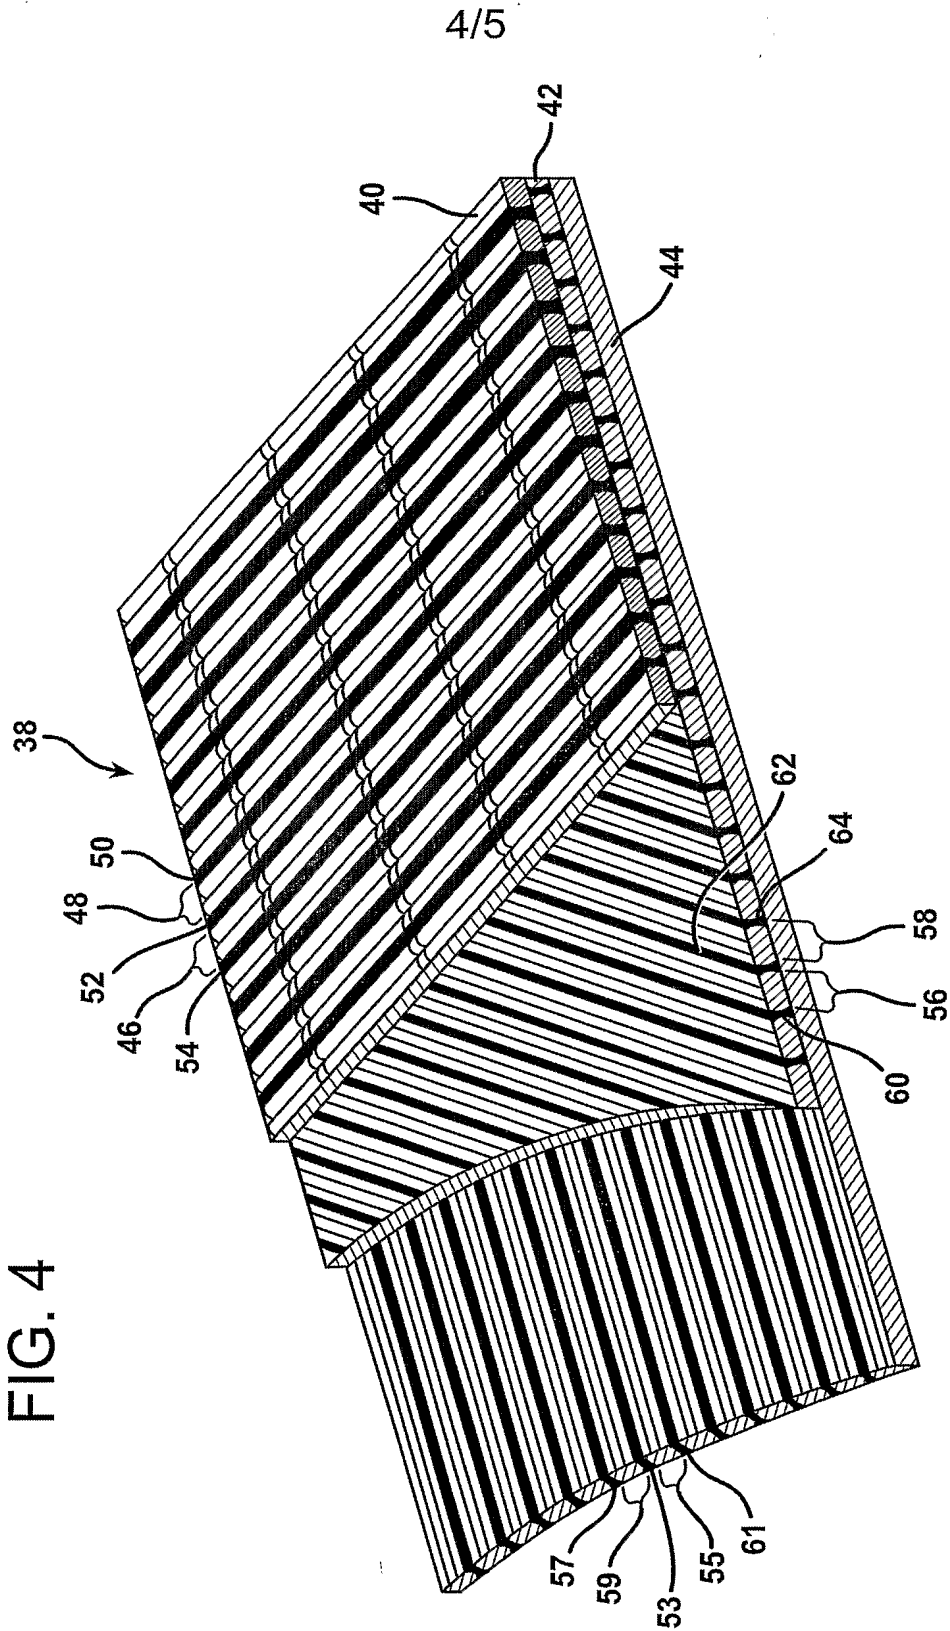

5/5

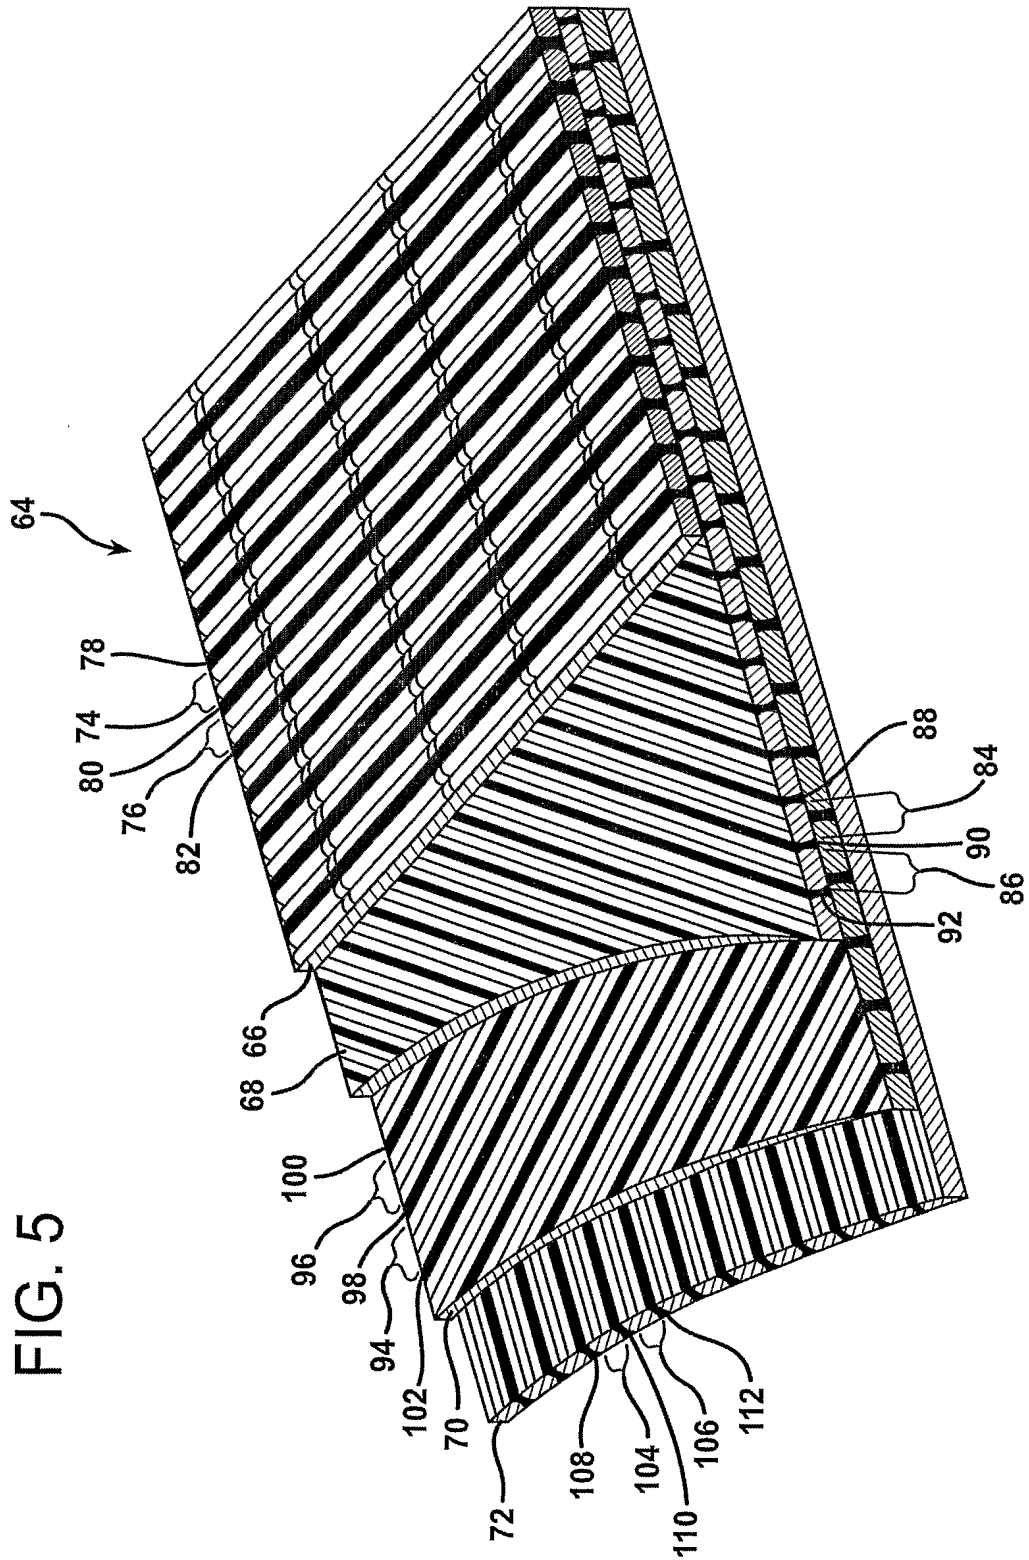

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2004/029605

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B29C70/22 B29C70/54

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B29C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 909 845 A (TORAY INDUSTRIES) 21 April 1999 (1999-04-21) page 6, paragraph 61; claim 7; figures 3,4	1-34
P,X	EP 1 419 875 A (TORAY INDUSTRIES) 19 May 2004 (2004-05-19) page 22, line 49 - page 23, line 4; figures	1-34
A	EP 0 270 411 A (BROCHIER SA) 8 June 1988 (1988-06-08) claims 1,6	1-34

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *F* document member of the same patent family

Date of the actual completion of the international search

13 January 2005

Date of mailing of the international search report

20/01/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Van Wallene, A

INTERNATIONAL SEARCH REPORT

formation on patent family members

International Application No

PCT/US2004/029605

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0909845	A	21-04-1999	AU 743038 B2	17-01-2002
			AU 7856298 A	11-02-1999
			CA 2244361 A1	04-02-1999
			CN 1210913 A	17-03-1999
			EP 0909845 A1	21-04-1999
			HU 9801783 A2	28-04-2000
			JP 11107105 A	20-04-1999
			TW 475953 B	11-02-2002
<hr/>				
EP 1419875	A	19-05-2004	EP 1419875 A1	19-05-2004
			US 2004241415 A1	02-12-2004
<hr/>				
EP 0270411	A	08-06-1988	FR 2605929 A1	06-05-1988
			AT 58329 T	15-11-1990
			AU 601508 B2	13-09-1990
			AU 8066987 A	12-05-1988
			CA 1331946 C	13-09-1994
			DE 3766228 D1	20-12-1990
			EP 0270411 A1	08-06-1988
			GR 3001381 T3	11-09-1992
			JP 7081224 B	30-08-1995
			JP 63203844 A	23-08-1988
			US 5484642 A	16-01-1996
<hr/>				